


EMN 200 .. 2000-W4 (3 phase Wye 4 wires)

The EMN (Energy Meter Node) series is an AC energy submeter with a wireless mesh network communications output. The W4 is designed for three phase networks with a line-to-neutral up to 300V rms. This module is compatible with the MeshGate L or XL.

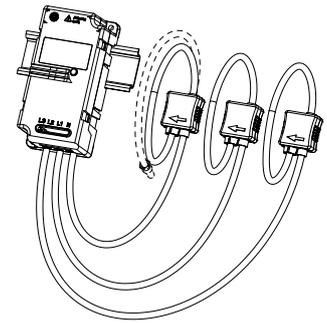

Electrical data

I_{PN}	Primary nominal current rms (A)	Types	
	200	EMN 200 W4	
	500	EMN 500 W4	
	1000	EMN 1000 W4	
	2000	EMN 2000 W4	
I_{PM}	Primary current, measuring range (of I_{PN})	120	%
V_{PM}	Primary voltage, measuring range (neutral/phase) ¹⁾	90 .. 300	V_{rms}
	Permanent overload voltage (neutral/phase)	300	V_{rms}
f	Frequency	50/60	Hz
S	Output signal: radio frequency communication ²⁾ see Mesh Gate datasheet		
	Power supply	Line powered between N-L1 inputs	
V_{PN}	Primary nominal, voltage (neutral/phase)	100 .. 272	V_{rms}
P_C	Maximum power consumption	2	W

Measurement value

	Configurable reading interval: 5 .. 30 min									Counter values					
	Interval base values			L2			L3			SUM	L1	L2	L3	SUM	
	L1														
	Av	Min	Max	Av	Min	Max	Av	Min	Max						
Current (A)															
Voltage (V)															
Active Energy (KWh)															
Reactive Energy (kVarh)															
Apparent Energy (kVA)															

f Frequency measured in phase 1 (L1)

Accuracy

X	Accuracy @ $T_A = 25^\circ C$	Max	
	Rms current @ I_{PN}	1.5	%
	Rms voltage @ V_P	1.5	%
	Active Energy (refer to IEC 62053-21 class 1)	± 1	%
	Reactive Energy (refer to IEC 62053-23 class 3)	± 3	%

General data

T_A	Ambient operating temperature (90 % RH max)	- 10 .. + 55	$^\circ C$
T_S	Ambient storage temperature	- 25 .. + 70	$^\circ C$
m	Mass	400	g
IPxx	Protection index	IP 2X	
	Standards	EN 50178: 1997	
		IEC 61010-1: 2001	
	Range to Mesh Gate or Mesh Node (indoor, line of sight)	30	m

Notes: ¹⁾ See connection diagram

²⁾ RF Certification: CE, FCC, IC, Japan (pending)

Features

- Wide range of electrical parameters measurement
- Wireless communication on license free 2.4 GHz-transmit RF power maximum EIRP: 10 dBm (10mW)
- Class 1 accuracy active energy.

Advantages

- Fast & easy mounting:
 - Wireless communication
 - High accuracy split core Rogowski coil
 - Self powered from voltage line
- Compact
- Gateway interface: RS 232/485 Modbus RTU
- Ideal for retrofit applications.

Applications

- Energy sub-metering
- Network condition monitoring
- Energy audit & diagnostic
- Building energy management.

Application domain

- Energy Solutions.

EMN 200 .. 2000-W4 (3 phase Wye 4 wires)

Isolation characteristics



Isolation class II
IEC 61010-1 CAT III 300 V rms
Pollution degree: PD2

Safety

CB test Certificate N° FR 583050 IEC System for mutual recognition of test certificates for electrical equipment (IECEE) CB Scheme.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock: do not remove any parts of the EMN - W4.



For current sensor (Rogowski coil) mounting:
make sure that the power cable on which the CT will be attached is powered off.

Dimensions EMN 200 .. 2000-W4 (3 phases Wye 4 wires) (in mm)

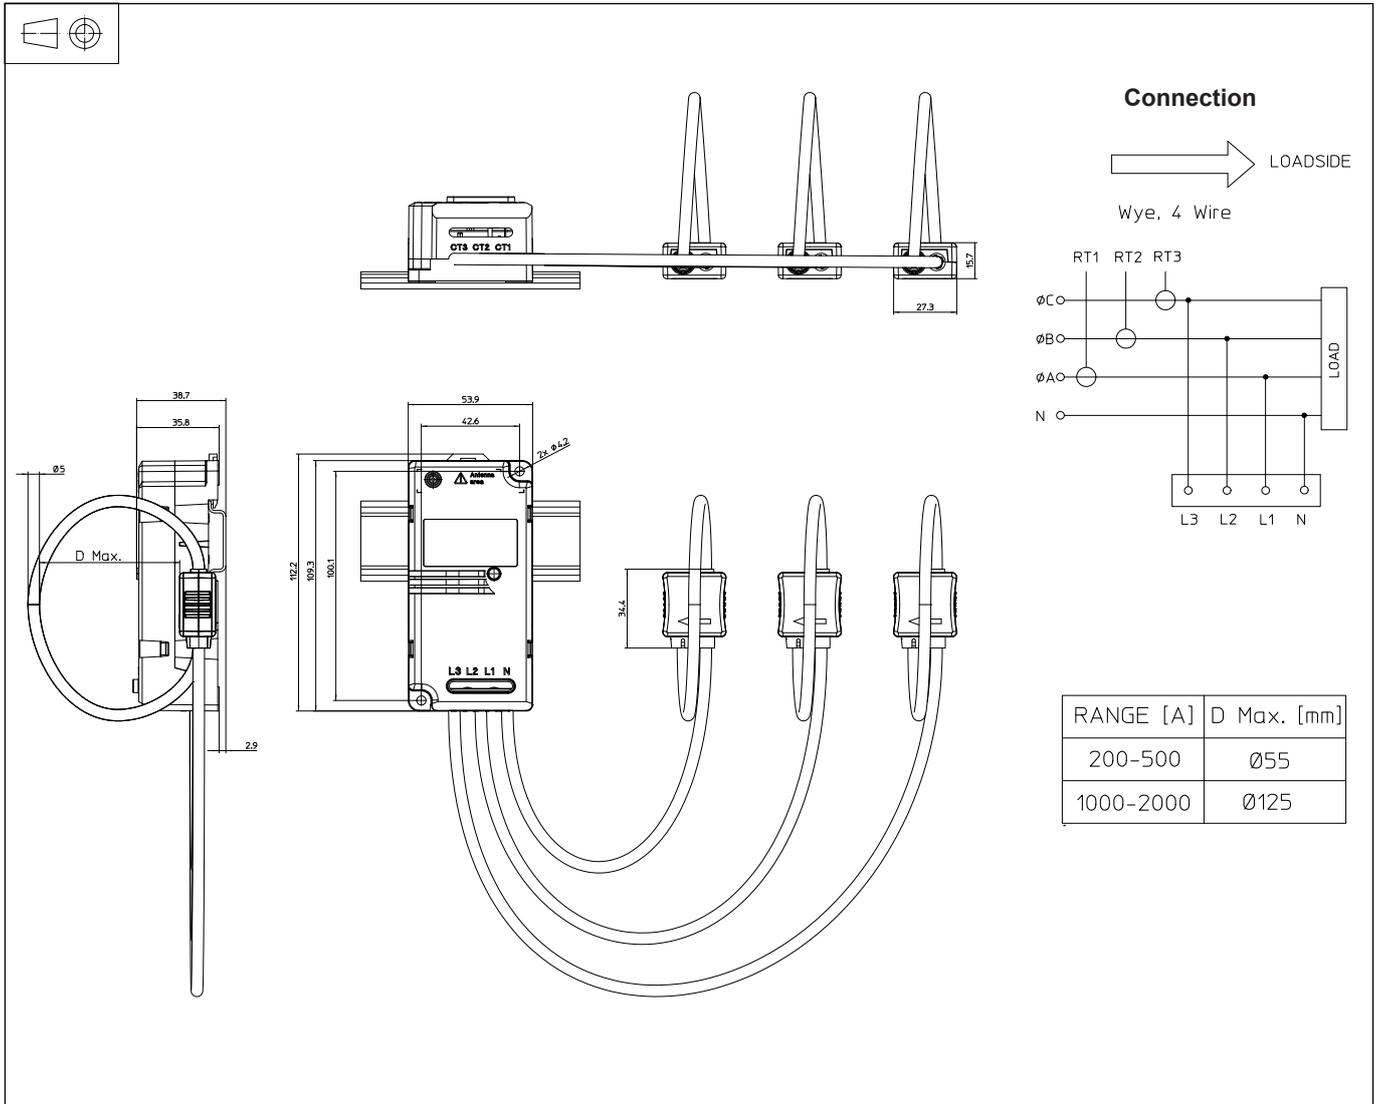

Mechanical characteristics

- General tolerance ± 1 mm
- Primary through-hole of Rogowski coil see drawing above
- Rogowski coil output cable length: 1.5 m
- Module fixing DIN rail rear box or
- Module fastening 2 slots ∅ 4.2 mm
2 M4 steel nuts
- Recommended fastening torque 2.8 Nm
- Voltage connections 4 M3
- Recommended fastening torque 0.5 Nm
- Input voltage terminal use cable max cross section 2.5 mm²

Remarks

- Temperature of the primary conductor should not exceed 65°C
- EMN module must be installed vertically as shown on the diagram above..